


DIRECTIONAL VALVES

SH SERIES SHUTTLE VALVES SH 換瓦


◆ MODEL

SH-03T

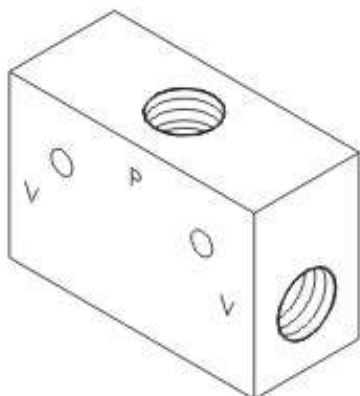

◆ CONTROL PORT(S)

1



◆ SPECIFICATIONS 要 印

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 Lpm	Weight 重量 Kg
SH-03T	70 (1015 psi)	25 (6.61 gpm)	0.8 (1.76 bs)
Fluid Type 液體型式		ISO VG 32,46,68	
Viscosity 黏性 cSt		10~400 (59~1854SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158°F)	
Contamination Level 污染標準		β ₁₀ ≥75, Under NAS Class 12,25μ	

◆ HOW TO ORDER

1	2	3
SH	— 03	T

1 VALVE SERIES

SH = SHUTTLE VALVE
換動閥

3 CONNECTING TYPE 銜接

T:TYPE:THREADING TYPE (螺紋連接)

2 SUBPLATE MOUNTING SIZE 口徑

03T = 3/8"

◆ DIMENSIONS

