


PRESSURE CONTROL VALVES 壓力控制閥

VDS SERIES CARTRIDGE PILOT OPERATED VALVES VDS 系列插入式引導式方向閥


MODEL 型式

VDS-03

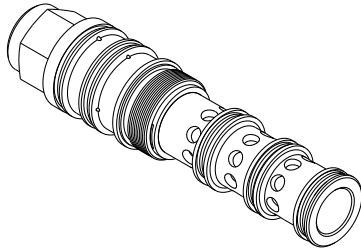


PERFORMANCE 特性曲線

VDS-03-C

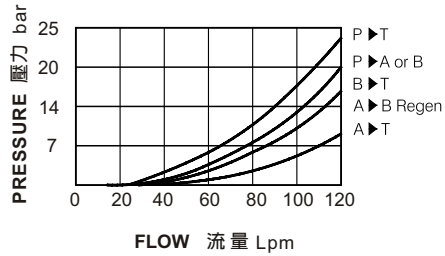

VDS-03-D

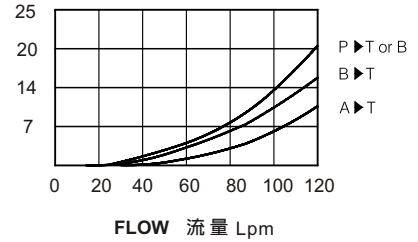

SPECIFICATIONS 規格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VDS-03	350 (5076 psi)	80 (21.13 gpm)	0.45(0.99 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

HOW TO ORDER 編號說明

1	2	3
VDS	03	C2

- 1 VALVE SERIES 系列名稱**
VDS = CARTRIDGE PILOT OPERATED VALVE
插入式引導式方向閥


- 2 SUBPLATE MOUNTING SIZE 稱呼口徑**
03: T-62A
Cavity 孔口: CST-62A
See Cavities Dimensions Page
見孔口尺寸頁面

- 3 SPOOL CONFIGURATION CAPACITY (Lpm) 軸型式流量**

C	D	03
C2	D2	80
C6	-	80
C3	D3	40
C4	-	80
C10	-	80
C12	-	80

Typical switching pilot pressure differential between pilot ports 5 and 6 is 13.79 bar.
做切換時油口5和6的壓力差為13.79bar

CONTROL PORT(S) 動作形式

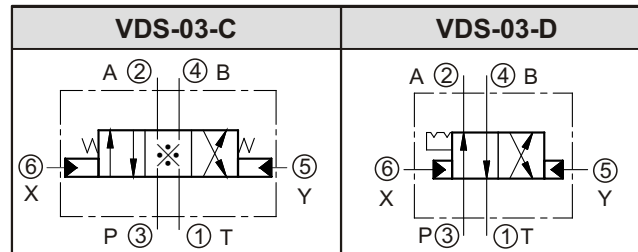

DIMENSIONS 外型尺寸圖

