



PRESSURE CONTROL VALVES 壓力控制閥

VBP SERIES CARTRIDGE REDUCING VALVES (PILOT OPERATED TYPE) VBP 系列插入式減壓閥(導壓式)

◆ MODEL 型 式 VBP-10

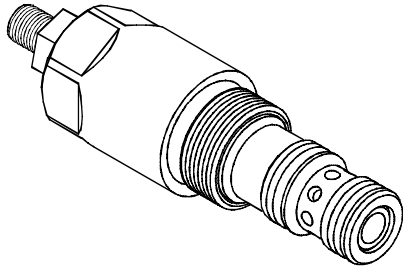

◆ PERFORMANCE (Cartridge Only) 特性曲線

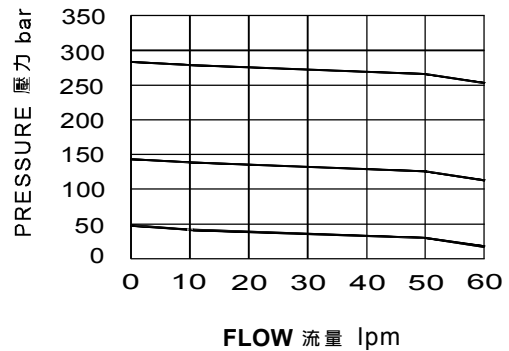

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VBP-10	350 (5076 psi)	60 (15.85gpm)	0.22 (0.49 lbs)
Fluid Type 流體型式		ISO VG 32 , 46 , 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ HOW TO ORDER 編號說明

1	2	3	4	5
VBP	10	*	*	*

1 VALVE SERIES 系列名稱

VBP = CARTRIDGE TYPE REDUCING VALVES
(PILOT OPERATED TYPE)
插入式減壓閥(導壓式)

2 SUBPLATE MOUNTING SIZE 稱呼口徑

Size : 10
Cavity 孔口:CS10-3N
See Page Appendixes-A_002
見附錄A_002 頁面

3 ADJUSTMENT PRESSURE 壓力調整範圍


Code 編碼	Adjustment pressure 壓力調整範圍
05	1 ~ 50 (bar)
07	2 ~ 70 (bar)
14	10 ~ 140 (bar)
28	70 ~ 280 (bar)
35	140 ~ 350 (bar)

4 ADJUSTMENT OPTION 調整選擇

NONE:TOOLADJUST 無 : 工具調整式

5 DESIGN NO 設計編號

◆ CONTROL PORT(S) 動作形式



◆ DIMENSIONS 外型尺寸圖

