



◆ MODEL 型 式

VCQ-12

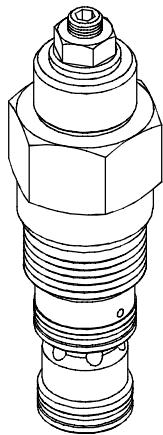

◆ PERFORMANCE(Cartridge Only)

特性曲線

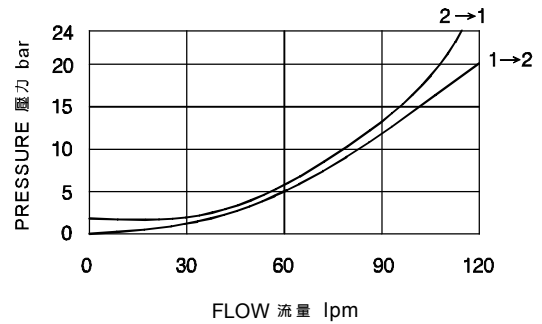

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Pilot Ratio 引導比例	Adjustment Pressure 壓力調整範圍 bar	Maximum Flow 最大流量 Lpm	Weight 重量 Kg
VCQ-12	350 (5076 psi)	1:1 / 4:1 / 8:1	* ~ 350	120 (31.70 gpm)	0.38 (0.84 lbs)
Fluid Type 流體型式			ISO VG 32,46,68		
Viscosity 黏性 cSt			10~400 (59~1854SSU)		
Operating Temperature 操作溫度 °C			-30~100 (-22~212°F)		
Contamination Level 污染標準			ISO4406. 21/19/16 NAS1638,10		

◆ HOW TO ORDER 編號說明

1	2	3	4	5
VCQ	12	35	*	8A

1 VALVE SERIES 系列名稱

VCQ= Cartridge Type Counter Balance Valves
插入式抗衡閥

2 SUBPLATE MOUNTING SIZE 稱呼口徑

Size:12
Cavity 孔口:CS12-3S
See Page Appendixes-A_003
見附錄A_003 頁面

3 ADJUSTMENT PRESSURE 壓力調整範圍

Pilot ratio 引導比例	Code 編碼	Adjustment pressure 壓力調整範圍
4:1	20	70 ~ 210 (bar)
	35	140 ~ 350 (bar)
1:1	20	70 ~ 210 (bar)
	35	140 ~ 350 (bar)


4 ADJUSTMENT OPTION 調整選擇

NONE:TOOL ADJUST 無：工具調整式

5 PILOT RATIO 引導比例

1A: 1:1
4A: 4:1
8A: 8:1

◆ CONTROL PORT(S) 動作形式



◆ DIMENSIONS 外型尺寸圖

