



PRESSURE CONTROL VALVES 壓力控制閥

VRB SERIES CARTRIDGE BALANCE VALVES (Pilot Operated Reducing/Relieving Valves) VRB 系列插入式平衡閥(導壓操作減泄壓閥)


◆ MODEL 型 式 VRB-06

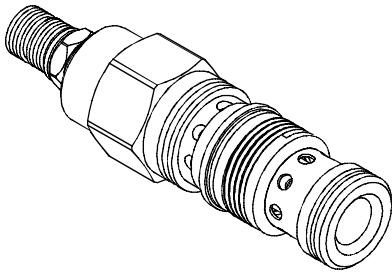

◆ PERFORMANCE 特性曲線

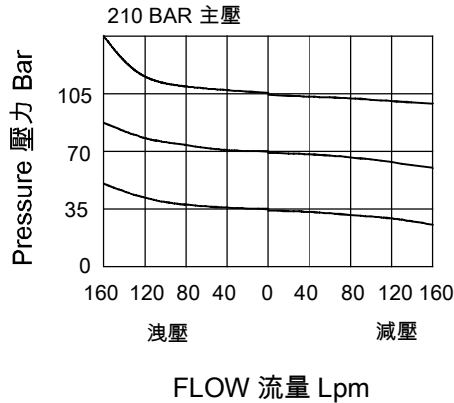

◆ CONTROL PORT(S) 動作形式



◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
VRB-06	350 (5076psi)	160 (42.27gpm)	0.61 (1.35 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ HOW TO ORDER 編號說明

1	2	3	4	5	6
VRB	06	*	*	*	*

1 VALVE SERIES 系列名稱

VRB=CARTRIDGE BALANCE VALVES
(Pilot Operated Reducing/Relieving Valves)
插入式平衡閥(導壓操作減泄壓閥)

2 SUBPLATE MOUNTING SIZE 稱呼口徑

06 : T-17A
Cavity 孔口: CST-17A
See Page Appendixes-A_007
見附錄 A_007 頁面

3 ADJUSTMENT PRESSURE 壓力調整範圍

Order 編號	Adjustment pressure 壓力調整範圍
06	4 ~ 60 (bar)
10	4 ~ 105 (bar)
20	7 ~ 210 (bar)
30	10 ~ 315 (bar)

4 FILTER OPTION 過濾網選擇

NONE	NONE: Damping hole with filter. 無：阻尼孔有過濾網
NF	NF: Damping hole without filter. NF：阻尼孔無過濾網

5 ADJUSTMENT OPTION 調整選擇

NONE	NONE: TOOL ADJUST 無：工具調整式	
K	K: HAND-BAR ADJUST K：手把調整式	

6 DESIGN NO 設計編號

◆ DIMENSIONS 外型尺寸圖

