



### ◆ MODEL 型 式

VRC-035

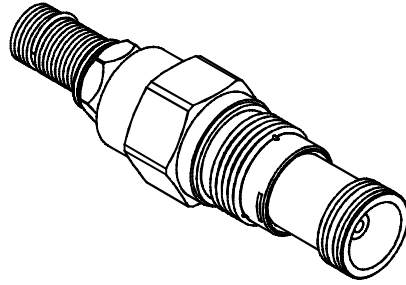

### ◆ PERFORMANCE(Cartridge Only)

特性曲線

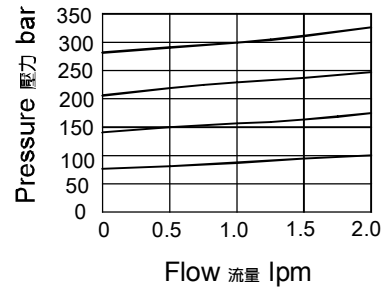

### ◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 Lpm	Weight 重量 Kg
VRC-035	420 (6092 psi)	2 (0.53 gpm)	0.27 (0.59 lbs)
Fluid Type 流體型式		ISO VG 32,46,68	
Viscosity 黏性 cSt		10~400 (59~1854SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 20/18/15 NAS1638. 9	

### ◆ HOW TO ORDER 編號說明

1	2	3	4
VRC	035	*	*

#### 1 VALVE SERIES 系列名稱

VRC= Cartridge Type Relief Valves  
插入式調壓閥

#### 2 SUBPLATE MOUNTING SIZE 稱呼口徑

035 : T-3A  
Cavity 孔口 : CST-3A  
See Appendices-A 見附錄A  
For Manifold See Appendices-B 油路板見附錄B


#### 3 ADJUSTMENT PRESSURE 壓力調整範圍

Code 編碼	Adjustment pressure 壓力調整範圍
02	※ ~ 25 (bar)
06	※ ~ 60 (bar)
10	※ ~ 100 (bar)
20	8 ~ 210 (bar)
30	8 ~ 315 (bar)
40	12 ~ 420 (bar)

#### 4 ADJUSTMENT OPTION 調整選擇

NONE	NONE:TOOL ADJUST 無：工具調整式	
K	K:HAND-BAR ADJUST K：手把調整式	

### ◆ CONTROL PORT(S) 動作形式



### ◆ DIMENSIONS 外型尺寸圖

