



◆ **MODEL 型 式**  
VRC-T8

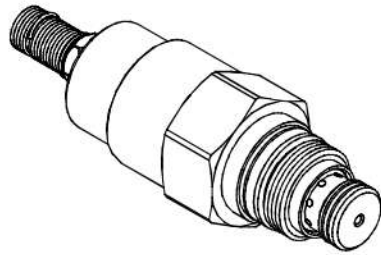

◆ **PERFORMANCE(Cartridge Only)**  
特性曲線

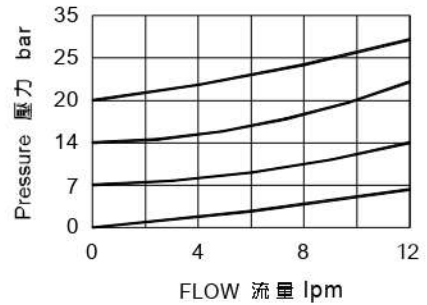

◆ **SPECIFICATIONS 規 格**

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 Lpm	Weight 重量 Kg
VRC-T8	350 (5076 psi)	10 (2.64 gpm)	0.14 (0.31 lbs)
<b>Fluid Type</b> 流體型式		ISO VG 32,46,68	
<b>Viscosity</b> 黏性 cSt		10~400 (59~1854SSU)	
<b>Operating Temperature</b> 操作溫度 °C		-30~100 (-22~212°F)	
<b>Contamination Level</b> 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ **HOW TO ORDER 編號說明**

1	2	3	4
VRC	T8	— *	— *

**1 VALVE SERIES** 系列名稱

VRC= Cartridge Type Direct Acting Relief Valves  
插入式直動調壓閥

**2 SUBPLATE MOUNTING SIZE** 稱呼口徑

T8: T-8 A  
Cavity 孔口: CST-8A  
See Page Appendixes-A\_007  
見附錄A\_007 頁面


**3 ADJUSTMENT PRESSURE** 壓力調整範圍

Code 編碼	Adjustment pressure 壓力調整範圍
06	2 ~ 55 (bar)
10	2 ~ 105 (bar)
20	2 ~ 210 (bar)
30	2 ~ 315 (bar)
40	2 ~ 420 (bar)

**4 ADJUSTMENT OPTION** 調整選擇

NONE	NONE: TOOL ADJUST 無：工具調整式	
K	K: HAND-BAR ADJUST K：手把調整式	

◆ **CONTROL PORT(S)** 動作形式



◆ **DIMENSIONS** 外型尺寸圖

