



◆ **MODEL 型 式**  
VFD-10

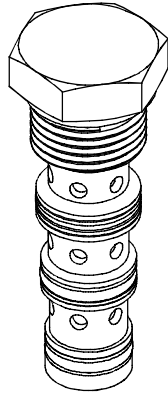

◆ **PERFORMANCE 特性曲線**

Test Conditions 測試條件  
Oil Temperature 油溫度: 50°C (122°F)  
Viscosity 黏性: 35 cSt (163 SSU)

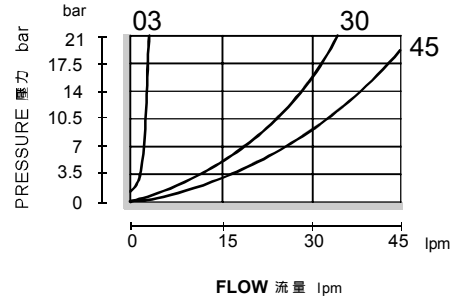

◆ **SPECIFICATIONS 規 格**

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VFD-10	350 (5076 psi)	60 (15.85 gpm)	0.15 (0.33 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ **HOW TO ORDER 編號說明**

1	2	3
VFD	10	— 45

**1 VALVE SERIES 系列名稱**  
VFD = FLOW DIVIDER 分流閥


**2 SUBPLATE MOUNTING SIZE 稱呼口徑**  
Size : 10  
Cavity 孔口: CS10A-4N  
See Page Appendixes-A\_005  
見附錄A\_005 頁面

**3 FLOW SPECIFICATIONS 流量規格**

- 03: 1.2~3 l/min
- 07: 2.3~7.6 l/min
- 15: 4.5~15 l/min
- 22: 6.8~22.7 l/min
- 30: 9~30 l/min
- 37: 11~37 l/min
- 45: 13.5~45 l/min
- 60: 24~60 l/min

Division ratio: 50% - 50%  
分流比例  
Flow Accuracy: 3% ~ 10%  
分流精度

◆ **CONTROL PORT(S) 動作形式**



◆ **DIMENSIONS 外型尺寸圖**

