



◆ MODEL 型 式

VFD-12

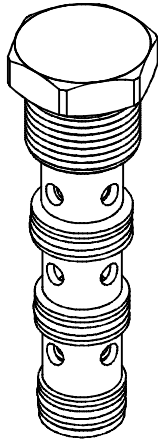

◆ PERFORMANCE 特性曲線

Test Conditions 測試條件
 Oil Temperature 油溫度: 50°C (122°F)
 Viscosity 黏性: 35 cSt (163 SSU)

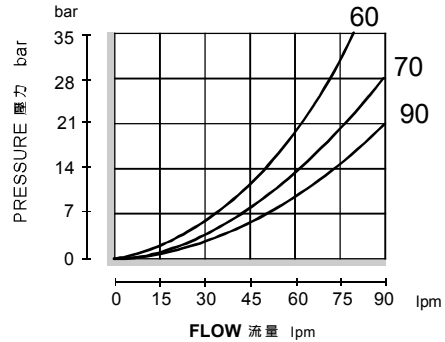

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VFD-12	350 (5076 psi)	90 (23.78 gpm)	0.3 (0.66 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ HOW TO ORDER 編號說明

1	2	3
VFD	12	— 60

1 VALVE SERIES 系列名稱

VFD = FLOW DIVIDER 分流閥

2 SUBPLATE MOUNTING SIZE 稱呼口徑


Size : 12
 Cavity 孔口: CS12A-4N
 See Page Appendixes-A_005
 見附錄A_005 頁面

3 FLOW SPECIFICATIONS 流量規格

60: 30~60 l/min
 70: 43~74 l/min
 90: 53~90 l/min

Division ratio: 50% - 50%
 分流 比例
 Flow Accuracy: 3% ~ 10%
 分流 精度

◆ CONTROL PORT(S) 動作形式



◆ DIMENSIONS 外型尺寸圖

