


◆ **MODEL 型 式**
VTV-12

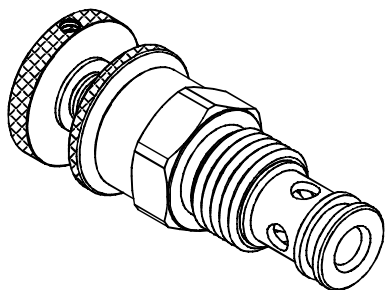


◆ **DESCRIPTION 說明**

A screw-in, cartridge-style, variable orifice, hydraulic flow restrictor valve.
以螺旋調節·插入型式·變動孔口·液壓流量控制閥

◆ **PERFORMANCE (Cartridge Only) 特性曲線**

Oil Temperature 油溫度: 50°C(122°F) Viscosity 黏度: 35 cSt

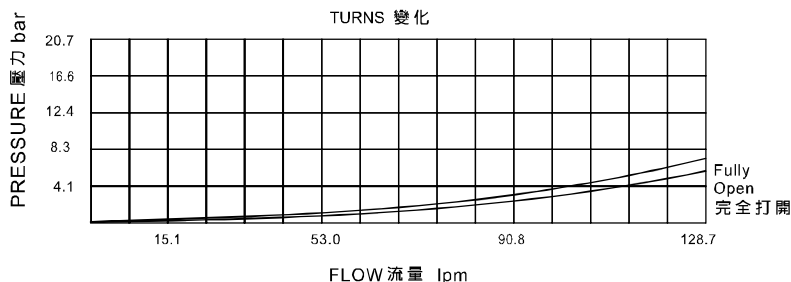

◆ **SPECIFICATIONS 規 格**

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VTV-12	350 (5076 psi)	128 (33.81 gpm)	0.32 (0.70 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ **HOW TO ORDER 編號說明**

1	2	3	4
VTV	12	— *	— *

1 VALVE SERIES 系列名稱
VTV= CARTRIDGE THROTTLE VALVES
插入式節流閥


2 SUBPLATE MOUNTING SIZE 稱呼口徑
Size:12
Cavity 孔口:CS12-2N
See Page Appendixes-A_001
見附錄A_001 頁面

3 ADJUSTMENT OPTION 調整選擇

NONE	NONE:TOOL ADJUST 無:工具調整式	
K	K:HAND-BAR ADJUST K:手把調整式	
K1	K1:HAND-BAR ADJUST K1:手把調整式	

4 DESIGN NO 設計編號

◆ **CONTROL PORT(S) 動作形式**



◆ **DIMENSIONS 外型尺寸圖**

