


◆ MODEL 型式 VTV-12U

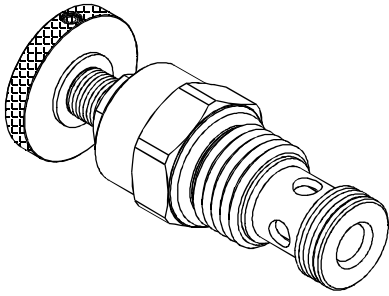


◆ DESCRIPTION 說明

A screw-in, cartridge-style, variable orifice, hydraulic flow restrictor valve.
以螺旋調節，插入型式，變動孔口，液壓流量控制閥

◆ PERFORMANCE (Cartridge Only) 特性曲線

Oil Temperature 油溫度: 50°C (122°F) Viscosity 黏度: 35 cSt

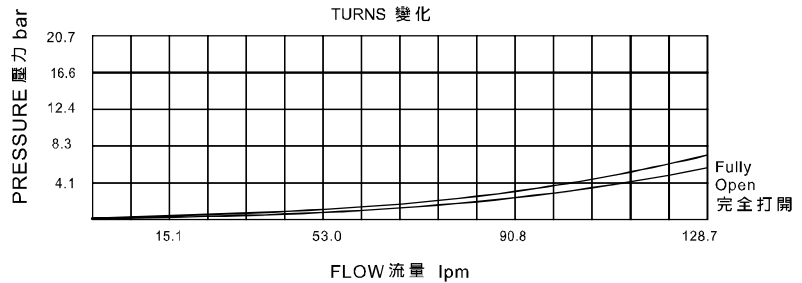

◆ SPECIFICATIONS 規格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VTV-12U	350 (5076 psi)	128 (33.81 gpm)	0.32 (0.70 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ HOW TO ORDER 編號說明

1	2	3	4
VTV	12U	— *	— *


1 VALVE SERIES 系列名稱

VTV= CARTRIDGE THROTTLE VALVES
插入式節流閥

2 SUBPLATE MOUNTING SIZE 稱呼口徑

Size: 12U
Cavity 孔口: CS12U-2N

◆ CONTROL PORT(S) 動作形式



3 ADJUSTMENT OPTION 調整選擇

NONE	NONE: TOOL ADJUST 無：工具調整式	
K	K: HAND-BAR ADJUST K：手把調整式	
K1	K1: HAND-BAR ADJUST K1：手把調整式	

4 DESIGN NO 設計編號

CS12U-2N

◆ DIMENSIONS 外型尺寸圖

