


DIRECTIONAL VALVES 方向閥


VCKL SERIES PILOT OPERATED CHECK VALVES VCKL 系列引導式止逆閥

◆ MODEL 型式

VCKL-02

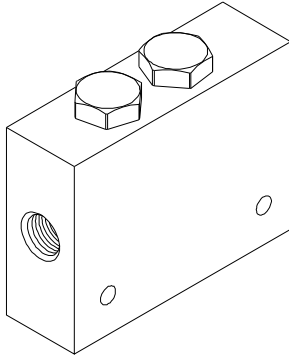

◆ CONTROL PORT(S) 動作形式



◆ SPECIFICATIONS 規格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Pilot Ratio 引導比例	Flow 流量 lpm	Weight 重量 Kg
VCKL-02	350 (5076 psi)	3:1	60 (15.85 gpm)	2.1 (4.63 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68		
Viscosity 黏性 cSt		10~400 (59~1854 SSU)		
Operating Temperature 操作溫度 °C		-15~70 (-5~158°F)		
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10		

◆ HOW TO ORDER 編號說明

1	2	3	4
VCKL	02	* — *	* — *

1 VALVE SERIES 系列名稱

VCKL= PILOT OPERATED CHECK VALVES
引導式止逆閥

2 SUBPLATE MOUNTING SIZE 稱呼口徑

02

3 PORTS DIMENSIONS 接口尺寸


A: 3/8
B: 1/2

4 THREADED TYPE 螺紋規格

1P : PT 3G : PF(G) 5B : BSP
2N : NPT 4A : SAE


◆ DIMENSIONS 外型尺寸圖

外型尺寸圖

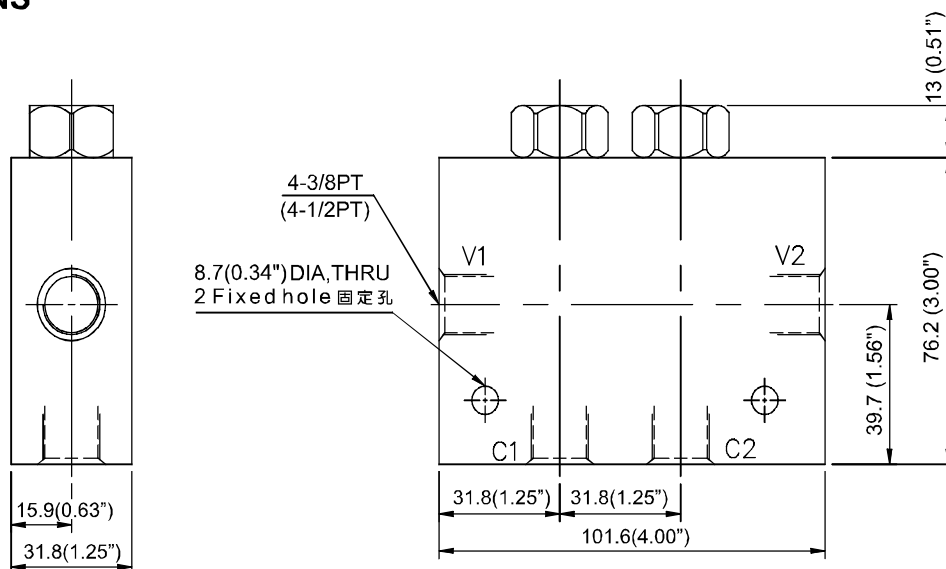


◆ **MODEL 型 式**

VCKL-03

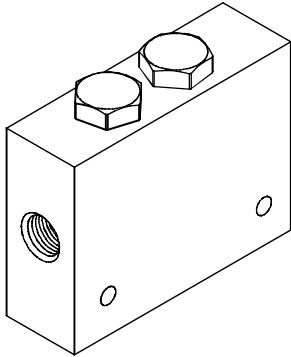


◆ **CONTROL PORT(S) 動作形式**



◆ **SPECIFICATIONS 規 格**

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Pilot Ratio 引導比例	Flow 流量 lpm	Weight 重量 Kg
VCKL-03	350 (5076 psi)	3:1	120 (31.70 gpm)	3.15 (6.94 lbs)
Fluid Type 流體型式		ISO VG 32 , 46 , 68		
Viscosity 黏性 cSt		10~400 (59~1854 SSU)		
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)		
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10		

◆ **HOW TO ORDER 編號說明**



1 VALVE SERIES 系列名稱
VCKL= PILOT OPERATED CHECK VALVES
引導式止逆閥



2 SUBPLATE MOUNTING SIZE 稱呼口徑
03: 1/2

3 PORTS DIMENSIONS 接口尺寸
A: 3/4
B: 1/2

4 THREADED TYPE 螺紋規格
1P : PT 3G : PF(G) 5B : BSP
2N : NPT 4A : SAE

◆ **DIMENSIONS**

外型尺寸圖

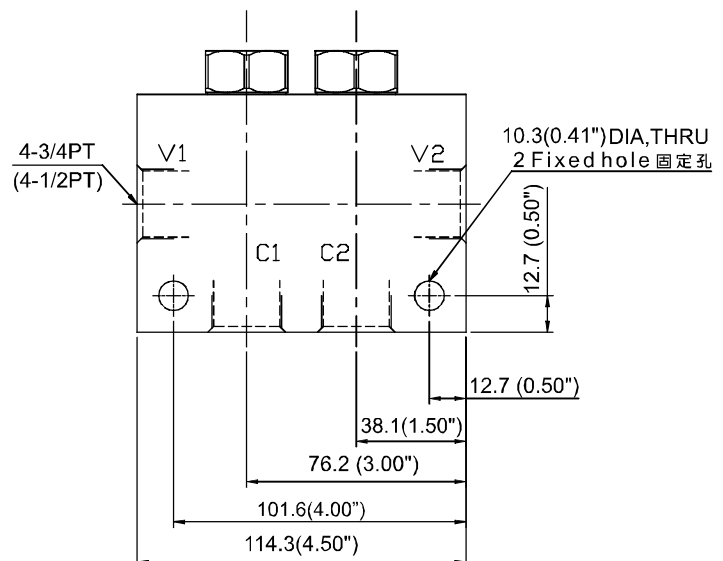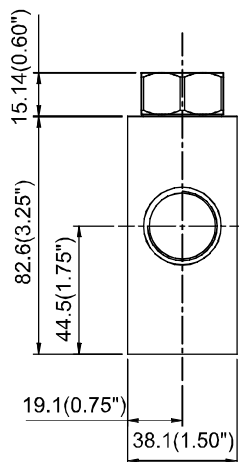


DIRECTIONAL VALVES 方向閥


VCKL SERIES PILOT OPERATED CHECK VALVES VCKL 系列引導式止逆閥

◆ MODEL 型 式

VCKL-06

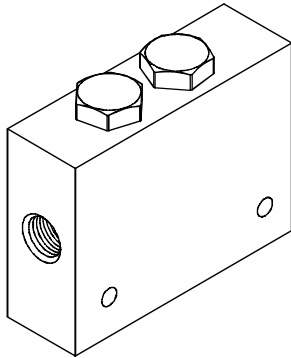

◆ CONTROL PORT(S) 動作形式



◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Pilot Ratio 引導比例	Flow 流量 lpm	Weight 重量 Kg
VCKL-06	350 (5076 psi)	3:1	200 (52.83 gpm)	8.25 (18.19 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68		
Viscosity 黏性 cSt		10~400 (59~1854 SSU)		
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)		
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10		

◆ HOW TO ORDER 編號說明

1	2	3	4
VCKL	06	*	*

1 VALVE SERIES 系列名稱

VCKL= PILOT OPERATED CHECK VALVES
引導式止逆閥

2 SUBPLATE MOUNTING SIZE 稱呼口徑

06: 3/4

3 PORTS DIMENSIONS 接口尺寸

A: 1"
B: 3/4

4 THREADED TYPE 螺紋規格

1P : PT 3G : PF(G) 5B : BSP
2N : NPT 4A : SAE

◆ DIMENSIONS

外型尺寸圖

