



### ◆ MODEL 型 式

VCX-06

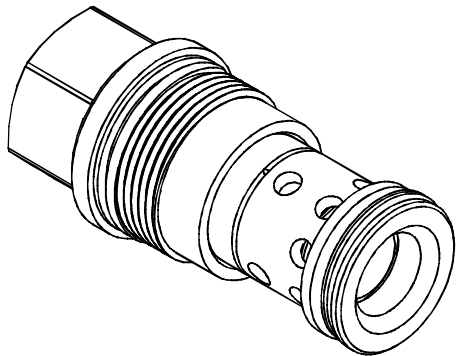

### ◆ PERFORMANCE (Cartridge Only)

特性曲線

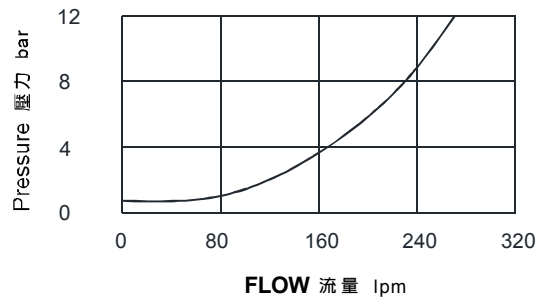

### ◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VCX-06	350 (5076 psi)	320 (84.54 gpm)	0.63 (1.39 lbs)
<b>Fluid Type</b> 流體型式		ISO VG 32, 46, 68	
<b>Viscosity</b> 黏性 cSt		10~400 (59~1854 SSU)	
<b>Operating Temperature</b> 操作溫度 °C		-30~100 (-22~212°F)	
<b>Contamination Level</b> 污染標準		ISO4406. 21/19/16 NAS1638,10	

### ◆ HOW TO ORDER 編號說明

1	2	3
VCX	06	05

#### 1 VALVE SERIES 系列名稱

VCX= Check Valves 止逆閥

#### 2 PORTING 閥口

06: T-16A

Cavity 孔口: CST-16A

See Page Appendixes-A\_007

見附錄A\_007 頁面

#### 3 BIAS SPRING 開啓壓力

05: 0.35 bar (5psi)


20: 2 bar (29psi)

40: 4 bar (58psi)

50: 5 bar (73psi)

70: 7 bar (101.5psi)

### ◆ CONTROL PORT(S) 動作形式



### ◆ DIMENSIONS 外型尺寸圖

