


◆ **MODEL** 型 式
VLS-04




◆ **DESCRIPTION** 說 明

Shuttle Valves, cartridge-style hydraulic check valve, for use in blocking circuits where a priority of flow/direction is given to a higher pressure circuit over a lower one.

梭動閥，插入式油壓止逆閥，在流量/方向被優先供應至較高的壓力迴路時，用於阻擋低壓迴路。

◆ **PERFORMANCE** 特性曲線
(Cartridge Only)

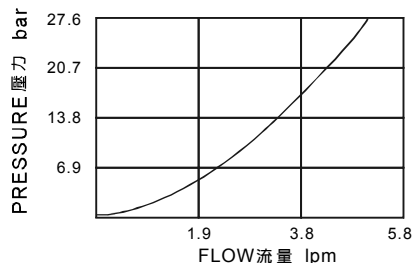

◆ **SPECIFICATIONS** 規 格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VLS-04	350 (5076psi)	6 (1.59 gpm)	0.01 (0.02 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ **HOW TO ORDER** 編號說明


1	2
VLS	04

1 VALVE SERIES 系列名稱
VLS= CARTRIDGE SHUTTLE VALVES
插入式梭動閥

2 PORTING 閥口

Size: 04
Cavity 孔口: CS04-B3
See Page Appendixes-A_001
見附錄A_001 頁面

◆ **CONTROL PORT(S)** 動作形式



◆ **DIMENSIONS** 外型尺寸圖

