



◆ **MODEL 型 式**

VPK-12

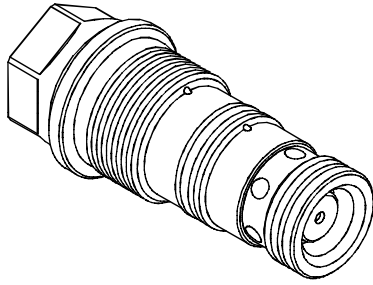

◆ **PERFORMANCE(Cartridge Only)**

特性曲線

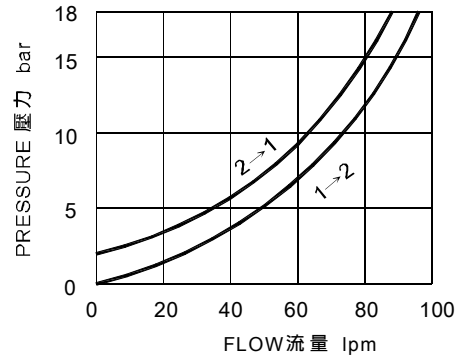

◆ **SPECIFICATIONS 規 格**

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Cracking Pressure 開啟壓力 bar	Pilot Ratio 引導比例	Maximum Flow 最大流量 Lpm	Weight 重量 Kg
VPK-12	350 (5076 psi)	2 (29 psi)	3.2 : 1	120 (31.70 gpm)	0.26 (0.57 lbs)
Fluid Type 流體型式			ISO VG 32,46,68		
Viscosity 黏性 cSt			10~400 (59~1854SSU)		
Operating Temperature 操作溫度 °C			-15~70 (-5~158°F)		
Contamination Level 污染標準			ISO4406. 21/19/16 NAS1638,10		

◆ **HOW TO ORDER 編號說明**

1	2	3
VPK	12	*

1 VALVE SERIES 系列名稱

VPK=CARTRIDGE PILOT
OPERATED CHECK VALVES

插入式引導止逆閥

2 SUBPLATE MOUNTING SIZE 稱呼口徑

Size : 12


Cavity 孔口:CS12-3S

See Page Appendixes-A_003

見附錄A_003 頁面

3 DESIGN NO 設計編號

◆ **CONTROL PORT(S) 動作形式**



◆ **DIMENSIONS 外型尺寸圖**

