



### ◆ MODEL 型 式

VSV08-205S



### ◆ PERFORMANCE 特性曲線

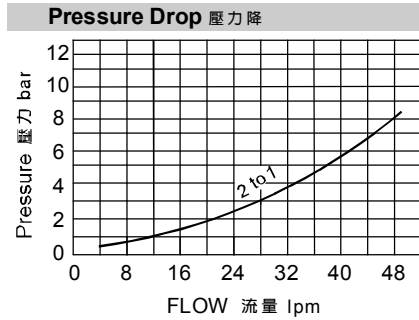

### ◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
VSV08-205S	350 (5076psi)	40 (10.57gpm)	0.45 (0.99 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

### ◆ HOW TO ORDER 編號說明

1	2	3	4	5	6
VSV	08	— 205S	— A2	— X	— Y


#### 1 VALVE SERIES 系列名稱

VSV=Cartridge Type Solenoid Operated Check Valves (Speed)  
插入式電磁止逆閥(快速型)

#### 2 SUBPLATE MOUNTING SIZE 稱呼口徑

Size:08  
Cavity 孔口 : CS08-2N  
See Page Appendixes-A\_001  
見附錄A\_001 頁面

#### 3 CONTROL PORT(S) 動作形式

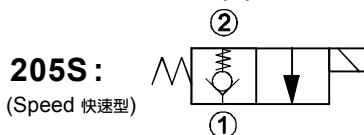


#### 4 TYPE OF COIL 線圈類型

Non: Without Coil 無記號:無線圈  
A1 : RAC110V 60/50HZ D1 : DC12V  
A2 : RAC220V 60/50HZ D2 : DC24V

#### 5 WIRING TYPE 接線型式

Non: WIRING BOX TYPE (DIN) X: DOUBLE LEAD  
無:接線盒式 (DIN) 雙接線方式



※ For more technical information of wiring typt please refer to the appendixes-D or contact with us .  
接線型式的詳細技術資料請查附錄-D或與我們聯繫.

#### 6 ADJUSTMENT OPTION 調整選擇


Non		Y	
Non: Standard 無記號: 標準型		Y: Twist Style Manual Override 旋緊型 - 手動操作復位	

### ◆ TECHNICAL DATA 技術數據

The only difference between this valve and the standard model is a spring placed between pilot section and poppet .  
該閥與標準閥的唯一區別是在先導部份和提動閥之間的彈簧 .

This design allows faster response times with very small flow or even virtually zero flow .  
這樣的設計在低流量甚至零流量時實現更快的響應時間 .

A pressure of approximately 5 bar (73 psi) is required to open the main poppet .  
主閥的開啓壓力約為 5 bar (73 psi) .

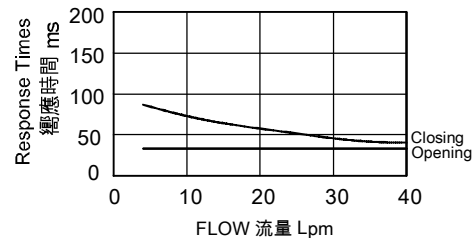

### ◆ DIMENSIONS 外型尺寸圖

