



◆ **MODEL 型 式**
VSV08-31S




◆ **PERFORMANCE 特性曲線**

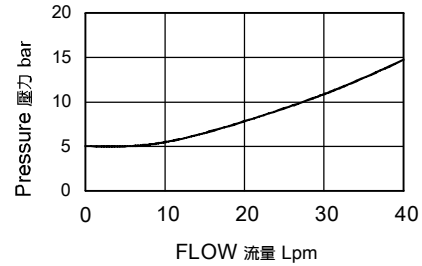

◆ **SPECIFICATIONS 規 格**

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
VSV08-31S	350 (5076psi)	40 (10.57gpm)	0.45 (0.99 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ **HOW TO ORDER 編號說明**




1 **VALVE SERIES 系列名稱**

VSV=Cartridge Type Solenoid Operated Check Valves (speed)
插入式電磁止逆閥(快速型)

2 **SUBPLATE MOUNTING SIZE 稱呼口徑**

Size : 08
Cavity 孔口:CS08-2N
See Page Appendixes-A_001
見附錄A_001 頁面

3 **CONTROL PORT(S) 動作形式**

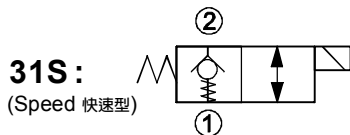

4 **TYPE OF COIL 線圈類型**

Non: Without Coil 無記號:無線圈
A1 : RAC110V 60/50HZ D1 : DC12V
A2 : RAC220V 60/50HZ D2 : DC24V

5 **WIRING TYPE 接線型式**

Non:WIRING BOX TYPE(DIN) X : DOUBLE LEAD
無:接線盒式(DIN) 雙接線方式




※ For more technical information of wiring typt please refer to the appendixes-D or contact with us .
接線型式的詳細技術資料請查附錄-D或與我們聯繫。

6 **ADJUSTMENT OPTION 調整選擇**

Non	Y
Non:Standard 無記號:標準型	Y:Twist Style Manual Override 旋緊型— 手動操作復位

◆ **TECHNICAL DATA 技術數據**

The only difference between this valve and the standard model is a spring placed between pilot section and poppet .
該閥與標準閥的唯一區別是在先導部份和提動閥之間的彈簧。
This design allows faster response times with very small flow or even virtually zero flow.
這樣的設計在低流量甚至零流量時實現更快的響應時間。
A pressuer of approximately 5 bar (73 psi) is required to open the main poppet. 主閥的開啟壓力約為 5 bar (73 psi).

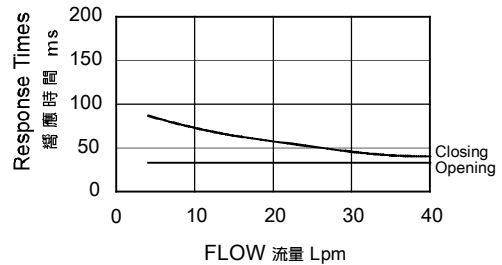

◆ **DIMENSIONS 外型尺寸圖**

