

SOLENOID OPERATED CARTRIDGE VALVES


插入式電磁閥

VSV SERIES CARTRIDGE TYPE SOLENOID OPERATED CHECK VALVES (SPEED)


vsv 系列插入式電磁止逆閥(快速型)

◆ MODEL 型 式

VSV10-31S



◆ PERFORMANCE 特性曲線

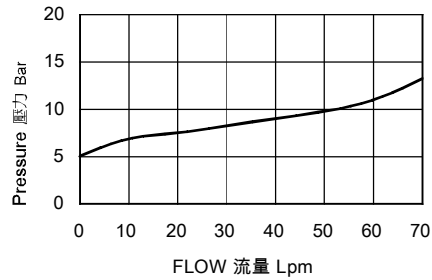

◆ SPECIFICATIONS 規 格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Maximum Flow 最大流量 lpm	Weight 重量 Kg
VSV10-31S	350 (5076psi)	70 (18.49gpm)	0.5 (1.10 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

◆ HOW TO ORDER 編號說明

1	2	3	4	5	6
VSV	10	— 31S —	A2	— X —	Y

1 VALVE SERIES 系列名稱

VSV=Cartridge Type Solenoid Operated Check Valves (speed)

插入式電磁止逆閥(快速型)

2 SUBPLATE MOUNTING SIZE 稱呼口徑


Size : 10

Cavity 孔口:CS10-2N

See Page Appendixes-A_001

見附錄A_001 頁面

3 CONTROL PORT(S) 動作形式



4 TYPE OF COIL 線圈類型


Non : Without Coil 無記號:無線圈

A1 : RAC110V 60/50HZ D1 : DC12V

A2 : RAC220V 60/50HZ D2 : DC24V

5 WIRING TYPE 接線型式

Non:WIRING BOX TYPE(DIN) X: DOUBLE LEAD
無:接線盒式(DIN) 雙接線方式



※ For more technical information of wiring typt please refer to the appendixes-D or contact with us .
接線型式的詳細技術資料請查附錄-D或與我們聯繫。

6 ADJUSTMENT OPTION 調整選擇

Non		Y	
Non:Standard 無記號:標準型		Y:Twist Style Manual Override 旋緊型- 手動操作復位	


◆ TECHNICAL DATA 技術數據

The only difference between this valve and the standard model is a spring placed between pilot section and poppet. 該閥與標準閥的唯一區別是在先導部份和提動閥之間的彈簧。


This design allows faster response times with very small flow or even virtually zero flow.

這樣的設計在低流量甚至零流量時實現更快的響應時間。

A pressure of approximately 4 bar (58 psi) is required to open the main poppet. 主閥的開啓壓力約為 4 bar (58 psi)。

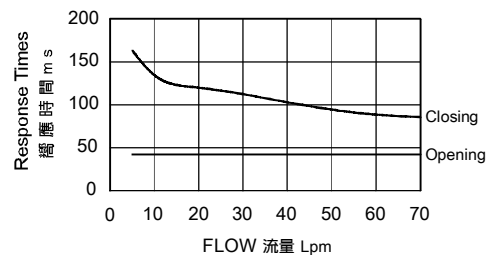

◆ DIMENSIONS 外型尺寸圖

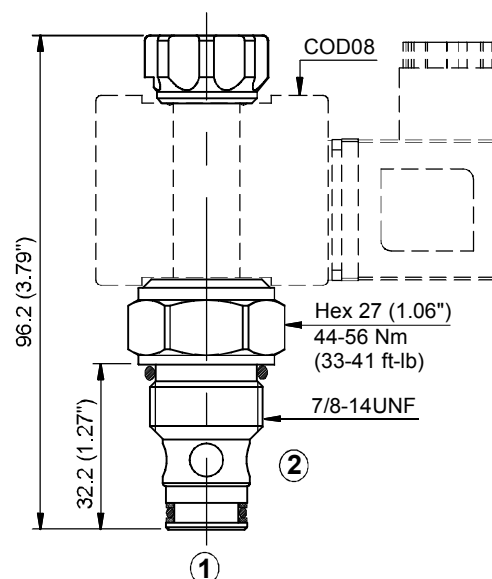

A
138

VSV