


# TL2 系列 SERIES


## TL2-40-D型(車用) TYPE (Mobile)



### 外觀尺寸 DIMENSIONS

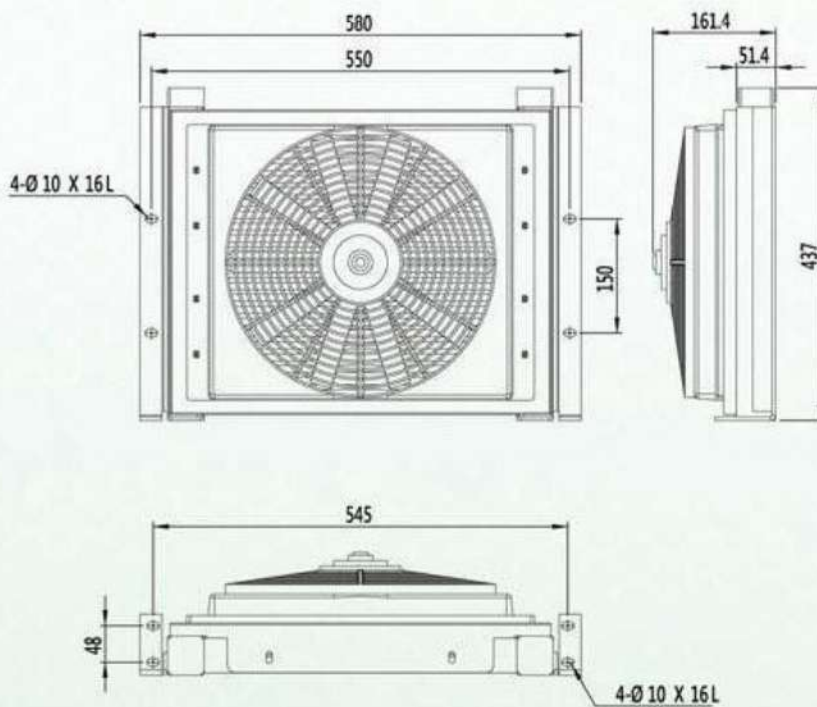

### 性能曲線 PERFORMANCE

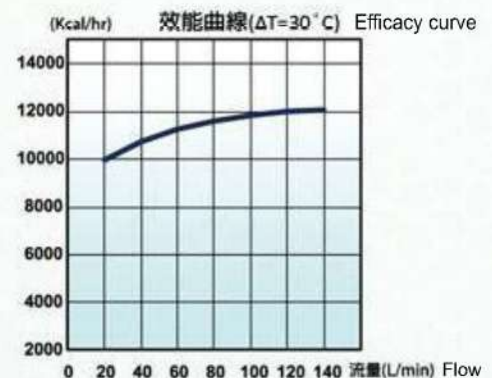

### 產品特性 CHARACTERISTIC

| Flow<br>使用流量<br>(L/min) | Maximum<br>Antipyretic<br>最大解熱能力<br>(Kcal/hr) | Pressure<br>使用壓力<br>(Kg/cm <sup>2</sup> ) | Voltage<br>使用電壓<br>(V, ±10%) | Frequency<br>使用頻率<br>(Hz) | Current<br>使用電流<br>(A, ±10%) | Capacity<br>使用功率<br>(Watt) | Speed<br>風扇轉速<br>(RPM, ±5%) | Air<br>空氣量<br>(m <sup>3</sup> /hr) | Protection<br>防護等級<br>(IP) | Noise<br>Value<br>噪音值<br>(dB(A)) | Fan<br>Certification<br>風扇認證 | Weight<br>重量<br>(Kg) |
|-------------------------|---|---|------------------------------|---------------------------|------------------------------|----------------------------|-----------------------------|------------------------------------|----------------------------|----------------------------------|------------------------------|----------------------|
| 110                     | 12,000  | 15  | DC12                         | -                         | 4.5                          | 54                         | 2,495                       | 1,360                              | 54                         | 70.6                             | CE                           | 10.0                 |
|                         |   |   | DC24                         | -                         | 2.5                          | 30                         | 2,272                       | 1,097                              |                            | 74.3                             |                              |                      |
|                         |   |   | 110                          | 50/60                     | 0.36/0.45                    | 40/50                      | 1,450/1,650                 | 2,700/3,300                        |                            | 62/65                            |                              |                      |
|                         |   |   | 220                          | 50/60                     | 0.18/0.23                    | 40/50                      | 1,450/1,650                 | 2,700/3,300                        |                            | 62/65                            |                              |                      |

### 注意事項 NOTICE

- 當冷卻裝置於油壓系統的回油迴路時，為保護冷卻器不因系統中的突波衝擊而破裂，建議加裝旁通卸油迴路為宜。  
When the cooler is applied with hydraulic system, in order not to be broken by surge in the system. Suggest installing the oil reducing device.
- 建議最佳使用方式：另外使用一台獨立小幫浦，單獨抽取油箱內的熱油送至冷卻器冷卻，使其成一獨立循環迴路。  
Best how-to-use: using another pump to draw the oil in the fuel tank into the cooler cooled. Make it an individual recycled circuit.
- 以上規格內容如有變更，依實際產品標示為準。  
If the data sheets above changed, based on actual products.
- 以上規格內容如有特殊需求，請與本公司聯絡。  
If you have any special inquiry of this product, please feel free to contact with us.