


DIRECTIONAL VALVES 方向閥



SF1 MECHANICAL SERVO VALVES 機械式伺服閥

MODEL 型式


SF1-03G

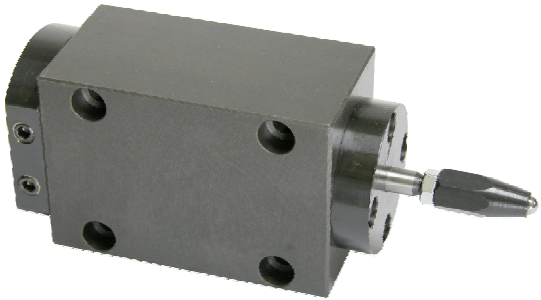

CONTROL PORT(S) 動作形式



Basic return circuit of oil pressure 油壓基本回路

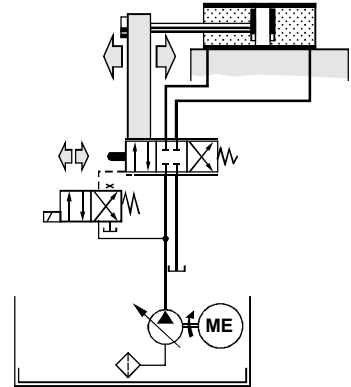

SPECIFICATIONS 規格

Model Number 型式號碼	Maximum Pressure 最大壓力 bar	Quota Flow 定額流量 lpm	Weight 重量 Kg
SF1-03G	70 (1015 psi)	30 (7.92 gpm)	2.0(4.4 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

HOW TO ORDER 編號說明

1	2	3	4	5
SF1	—	03	G	—
			E	*

- 1 VALVE SERIES 系列名稱**
SF1 = Mechanical Servo Valves
- 2 SUBPLATE MOUNTING SIZE: 稱呼口徑**
03 = 3/8"(9mm) ISO CETOP5
DIN NG 10 NFPA D05

- 3 CONNECTING TYPE 連接型式**
G:TYPE:BASEPLATE MOUNTING TYPE
(板式連接)

- 4 PILOT OPERATED WAY 引導壓方式**
E : OUTER 引導壓方式 E:外部

- 5 RELEASE WAY 排洩方式**
NONE:INNER T:OUTER
排洩方式 無:內部 T:外部

DIMENSIONS 外型尺寸圖

