


# PRESSURE CONTROL VALVES 壓力控制閥


**VGR SERIES CARTRIDGE BALANCE VALVES (Pilot Operated Reducing/Relieving Valves)** VGR 系列插入式平衡閥(導壓操作減泄壓閥)

## ◆ MODEL 型式

VGR-10

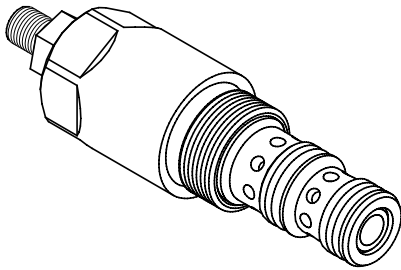

## ◆ PERFORMANCE 特性曲線

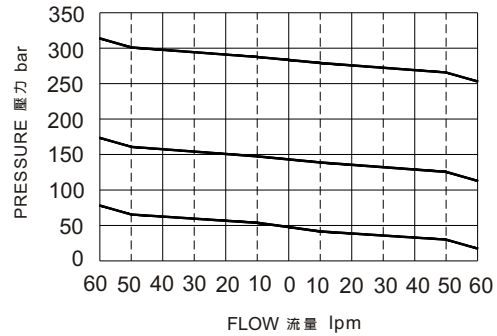

## ◆ SPECIFICATIONS 規格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VGR-10	350 (5076 psi)	60 (15.85 gpm)	0.22 (0.49 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-15~70 (-5~158°F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

## ◆ HOW TO ORDER 編號說明

1	2	3	4	5
VGR	10	*	*	*

### 1 VALVE SERIES 系列名稱

VGR = CARTRIDGE BALANCE VALVES  
(Pilot Operated Reducing/Relieving Valves)  
插入式平衡閥(導壓操作減泄壓閥)

### 2 SUBPLATE MOUNTING SIZE 稱呼口徑

Size : 10  
Cavity 孔口: CS10-3N  
See Page Appendixes-A\_002  
見附錄A\_002 頁面

### 3 ADJUSTMENT PRESSURE 壓力調整範圍


Order 編號	Adjustment pressure 壓力調整範圍
05	6 ~ 50 (bar)
07	6 ~ 70 (bar)
14	10 ~ 140 (bar)
28	70 ~ 280 (bar)
35	140 ~ 350 (bar)

### 4 ADJUSTMENT OPTION 調整選擇

NONE: TOOL ADJUST 無 : 工具調整式

### 5 DESIGN NO 設計編號

## ◆ CONTROL PORT(S) 動作形式



## ◆ DIMENSIONS 外型尺寸圖

