


# PRESSURE CONTROL VALVES 壓力控制閥


## VRV SERIES CARTRIDGE TYPE RELIEF VALVES VRV 系列插入式調壓閥

### ◆ MODEL 型式

VRV-03

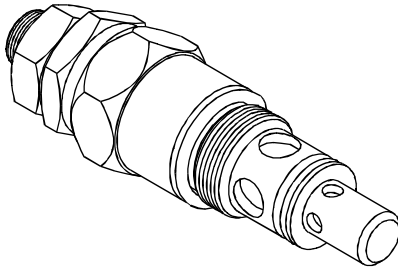

### ◆ CONTROL PORT(S) 動作形式

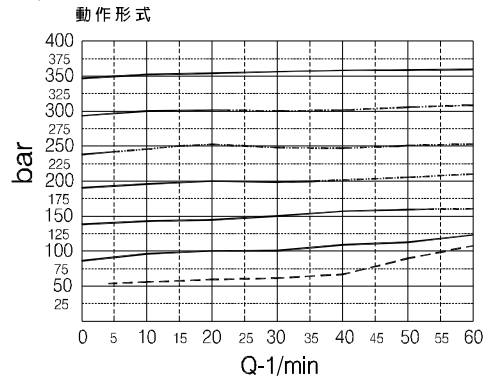

### ◆ SPECIFICATIONS 規格

Model Number 型式號碼	Operating Pressure 操作壓力 bar	Flow 流量 lpm	Weight 重量 Kg
VRV-03	315 (4569 psi)	60 (15.85 gpm)	0.18 (0.40 lbs)
Fluid Type 流體型式		ISO VG 32, 46, 68	
Viscosity 黏性 cSt		10~400 (59~1854 SSU)	
Operating Temperature 操作溫度 °C		-30~100 (-22~212 °F)	
Contamination Level 污染標準		ISO4406. 21/19/16 NAS1638,10	

### ◆ HOW TO ORDER 編號說明

1	2	3	4	5
VRV	03	*	*	20

#### 1 VALVE SERIES 系列名稱


VRV= CARTRIDGE TYPE RELIEF VALVES  
(DIRECT TYPE) 插入式調壓閥(直動式)

#### 2 SUBPLATE MOUNTING SIZE 稱呼口徑

#### 3 ADJUSTMENT PRESSURE 壓力調整範圍

Code 編碼	Adjustment pressure 壓力調整範圍
06	* ~ 60 (bar)
09	10 ~ 95 (bar)
14	15 ~ 140 (bar)
28	30 ~ 280 (bar)
35	38 ~ 380 (bar)

### ◆ CONTROL PORT(S) 動作形式



#### 4 ADJUSTMENT OPTION 調整選擇

NONE	NONE: TOOL ADJUST 無·工具調整式	
K	K: HAND-BAR ADJUST K: 手把調整式	

#### 5 DESIGN NO 設計編號

### ◆ DIMENSIONS 外型尺寸圖

